

**ADDENDUM 2
TO THE CONTRACT PROVISIONS AND CONTRACT PLANS**

FOR

**CITY OF LONG BEACH
WASHINGTON AVENUE RECONSTRUCTION
(51ST STREET TO SID SNYDER DRIVE)
G&O #20430**



ISSUED THIS DATE: MONDAY, MAY 3, 2021

**BID OPENING: 3:00 P.M. (LOCAL TIME) ON
WEDNESDAY, MAY 5, 2021
CITY OF LONG BEACH
115 BOLSTAD AVENUE WEST
LONG BEACH, WASHINGTON 98631**

Bidder shall acknowledge receipt of this Addendum on Page P-8 of the Proposal.

TO PROSPECTIVE BIDDERS:

The attention of all prospective bidders on the above project is directed to the following additions and modifications to the Contract Provisions and Contract Plans.

I. ADDITIONS, MODIFICATIONS, AND/OR DELETIONS TO THE SPECIAL PROVISIONS

ITEM 1:

Page 7-18, Special Provisions Section 7-09.5, PAYMENT.

DELETE the last paragraph and **REPLACE** it with the following paragraph :

“The unit contract price per linear foot for the respective diameters of “C900 PVC Pipe for Water Main, ____ In. Diam.” shall constitute full compensation for all labor, materials, tools, equipment, transportation, supplies, and incidentals required to complete all work to furnish and install this item to include, but not limited to, trench excavation, bedding, laying and jointing pipe and fittings, bedding, laying and jointing pipe and fittings, backfill with suitable native material, compaction, and removal and wastehaul of excess or unsuitable trench excavation material, dewatering, fittings, connections, joint restraint systems, tracer wire, marking tape, concrete blocking, installation and removal of temporary blowoff assemblies, material and compaction testing of suitable native backfill, pressure testing, flushing, disinfection and disposal of hypochlorinated water.”

ITEM 2:

Page 9-2, Special Provisions Section 9-30, WATER DISTRIBUTION MATERIALS

ADD the following new section after line 16:

“9-30 WATER DISTRIBUTION MATERIALS

9-30.5 Hydrants

This Section is supplemented with the following:

Fire hydrants shall be Kennedy K-81D with 5” Storz x 4-1/2 NST adapter with cap and cable or approved equal.”


II. ADDITIONS, MODIFICATIONS, AND/OR DELETIONS TO THE CONTRACT PLANS

ITEM 1:

SHEET WD-1, WATER DETAILS

DELETE Detail 1 “Water Main Typical Trench Section” and **REPLACE** with the attached revised Detail 1 “Water Main Typical Trench Section”

L:\LONGBEACH\20+30 Washington Street Water and Street Improvements\01 Design\Planset\Civil\WATR_DET.dwg, 5/3/2021 9:47 AM, ARTEMIS ZAFAR

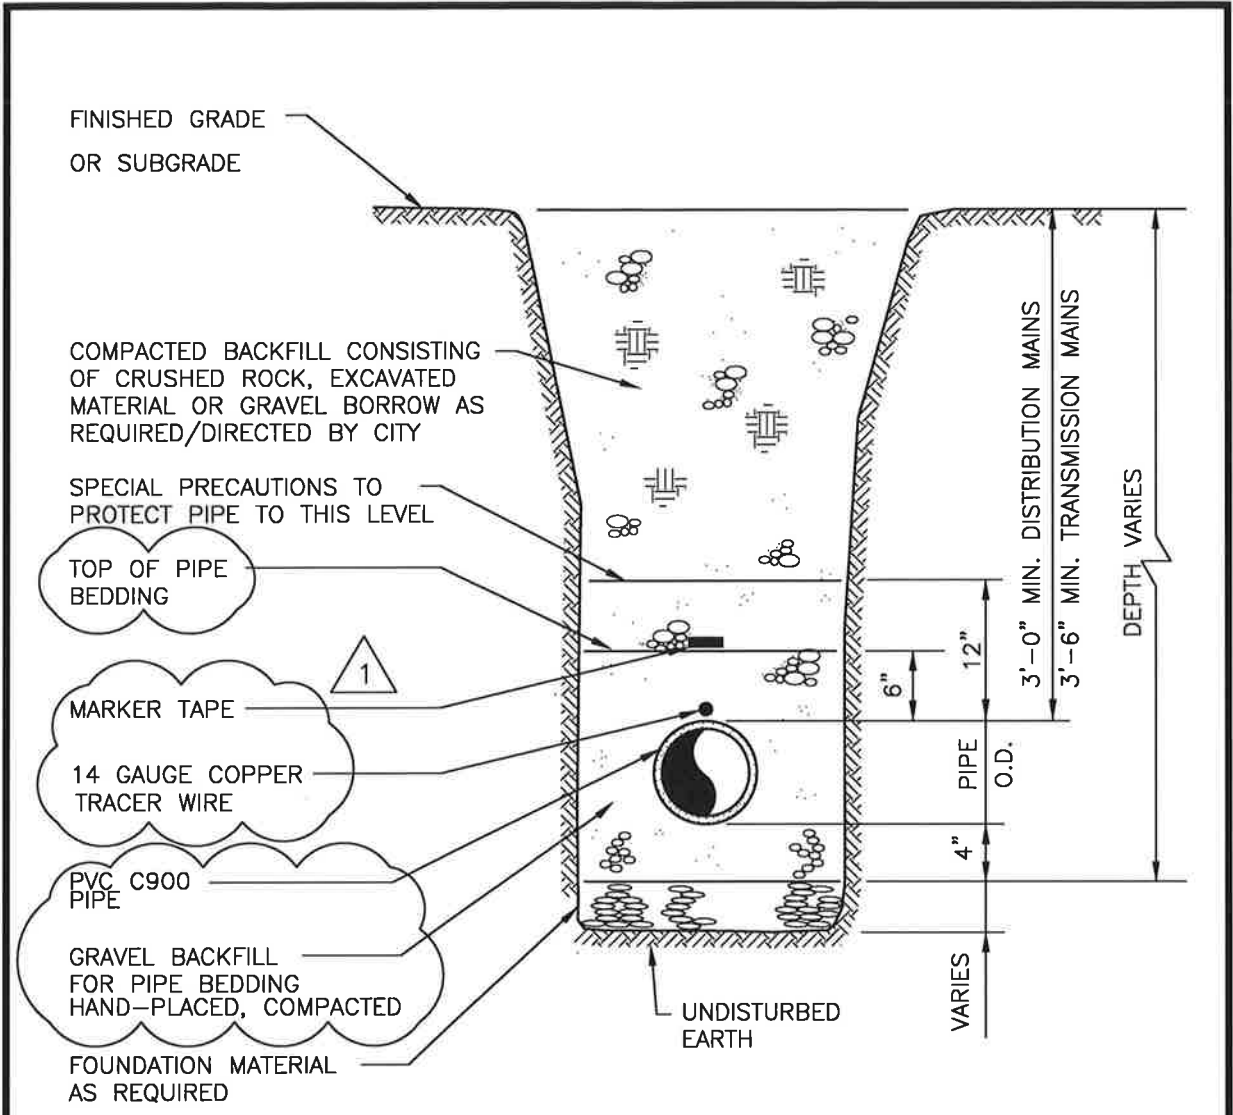


NOTE:

BACKFILL MATERIAL AND COMPACTION SHALL BE IN CONFORMANCE WITH THE CITY STANDARDS AND/OR THE STATE OR COUNTY PERMIT REQUIREMENTS (AS MAY BE REQUIRED)

MODIFIED

CITY OF LONG BEACH			
WATER MAIN TRENCH SECTION			
APPROVED:			DWG. NO.
BY CITY			WMTS
DATE:		DRWN:	CHKD:
8/96	J.H.	T.J.O.	SCALE:
			NONE



WATER MAIN TYPICAL TRENCH SECTION

NOT TO SCALE

