

**ADDENDUM NO. 2
TO THE CONTRACT PROVISIONS AND CONTRACT PLANS**


FOR

**CITY OF COVINGTON
TIMBERLANT STORMWATER LID RETROFIT PROJECT**

G&O #13599

ISSUED THIS DATE: TUESDAY, FEBRUARY 20, 2018

**BID OPENING: 2:00 P.M. (LOCAL TIME) ON
WEDNESDAY, FEBRUARY 21, 2018
CITY OF COVINGTON
16720 SE 271ST STREET, SUITE 100
COVINGTON, WASHINGTON 98042**

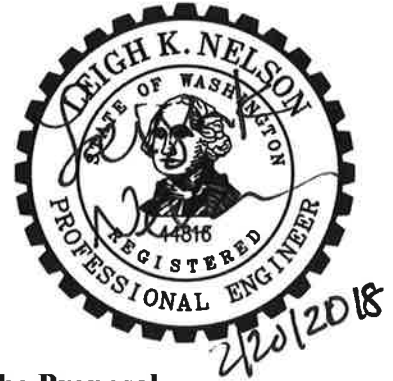

Bidder shall acknowledge receipt of this Addendum on Page P-9 of the Proposal.

TO PROSPECTIVE BIDDERS:

The attention of all prospective bidders on the above project is directed to the following additions and modifications to the Contract Provisions and Contract Plans.

I. ADDITIONS, MODIFICATIONS, AND/OR DELETIONS TO THE PROPOSAL

ITEM NO. 1:

Page P-3, Proposal

On Bid Item 33, Ecology Block Wall, **DELETE** the quantity "120 SF" and **REPLACE** with the following:

"120 LF"

II. ADDITIONS, MODIFICATIONS, AND/OR DELETIONS TO THE SPECIAL PROVISIONS

ITEM NO. 1:

Page 2-7, Special Provisions Section 2-03.5, Payment

REVISE the second paragraph of the section as shown below (added text is italicized, deleted text is shown as strike out):

"Excavation, Embankment and Grading, Incl. Haul," per ~~cubic yard~~ *lump sum.*"

ITEM NO. 2:

Page 2-8, Special Provisions Section 2-03.4, Payment

REVISE the first sentence of the third paragraph of the section as shown below (added text is italicized, deleted text is shown as strike out):

“The unit contract price per ~~cubic yard~~ *lump sum* for “Excavation, Embankment and Grading, Incl. Haul” shall be full pay for all materials, tools, labor, and equipment necessary for excavation to the grade lines shown including, but not limited to, haul, stockpiling, embankment construction with suitable excavated material, placing, shaping, and grading per Section 2-03, Subgrade Preparation per Section 2-06, Watering per Section 2-07, compacting, testing, loading, hauling to waste and disposing of all excess or unsuitable material, including logs, rocks, cobbles, etc.”

III. ADDITIONS, MODIFICATIONS, AND/OR DELETIONS TO THE CONTRACT PLANS

ITEM NO. 1:

SHEET 3, SITE 1 – SITE PLAN

ADD General Construction Note 6 as the following:

“6. ALL MATERIAL EXCAVATED FROM THE TRENCH AND WALL SHALL BE UTILIZED ON SITE AS NOTED.”